


LUMATIC AND BEKA LUBRICATION SYSTEMS

SECTION 1. SPRING OPERATED HAND PUMP FOR SINGLE LINE SYSTEMS

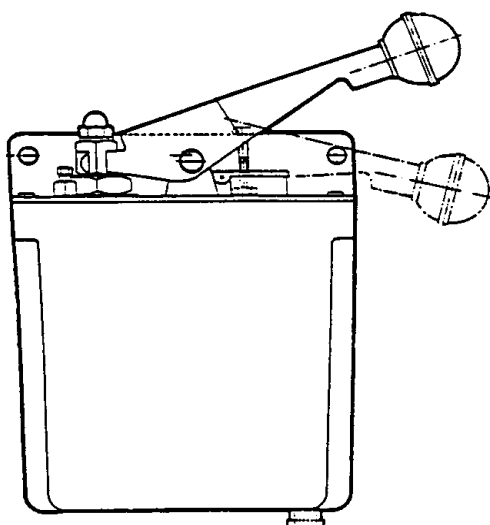

Note: Used with Flenco Low Pressure Oil Systems. Refer Flenco Flow Units and Manifolds shown on Pages 1 and 2 of the Flenco price list.

SPECIFICATIONS

Applications: Single line oil lubrication systems; Push down on the handle and a spring returns the piston discharging a steady flow of oil.

Pump Type:	Manual (8cc per stroke)
Maximum Pressure:	5 bar
Reservoir Size:	1.8 litres
Oil Viscosity:	Up to 250 cSt
Outlet connection:	4mm Tube (compression)

SEMI-AUTOMATIC PUMP

01-1614	Pump with 1.8 litre reservoir	Each	\$369.20
---------	-------------------------------	------	----------

SECTION 2. BEKA 2014 SERIES MULTILINE PUMP

SPECIFICATIONS

Pump Type:	Rotary, Multi-line
Number Of Outlets:	from 1 thru to 8 outlets
Lubricant Type:	Oil or grease to NLGI-2
Reservoir Size:	Up to 8Litres or 8 kg
Motor Dual voltage:	1380 RPM 240V / 415V
Pump Elements: refer Beka price list page 5 of 14	Fixed Element 2152990610000 Adjustable Element 2152990630000
Available Ratios:	80:1, 150:1, 300:1, 400:1 600:1, and 1200:1
Output per Outlet:	2.070cc per minute 80:1 1.104cc per minute 150:1 0.552cc per minute 300:1 0.414cc per minute 400:1 0.276cc per minute 600:1 0.138cc per minute 1200:1
Maximum Pressure:	280 Bar (4,110 PSI)
Outlet Connection:	6mm Tube (compression)



Bare pump with 8kg reservoir, no pump elements, ac motor drive	Each	\$3,981.10
add - PE-120 Fixed Output Pump Element (1 to 8) Code: 2152990610000	Each	\$202.40
add - PE-120V Adjustable Output Pump Element (1 to 8) Code: 2152990630000	Each	\$297.40


Different ratios, reservoir sizes and low level controls available POA

SECTION 3. BEKA FK PUMPS "57" SERIES

SPECIFICATIONS

Pump Type:	Rotary, multi-line
these Pumps have built-in reductions	14, 19 and 57:1 Reduction
Number Of Outlets:	1 to 6 or 1 to 12
Lubricant Type:	Oil or Grease to NLGI-2
Motor Type:	415V 3ph 0.18kw 2800 RPM
Motor Reduction:	15:1 Reduction (186.6 RPM)
Reservoir Size:	4 litres / 4kg Oil or Grease
Output:	Up to 1.3 cc/min/outlet
Outlets:	1/4"BSP

Pump Outputs are adjustable:
 14:1 ratio: 0 to 1.330cc per outlet per minute
 19:1 ratio: 0 to 0.982cc per outlet per minute
 57:1 ratio: 0 to 0.330cc per outlet per minute

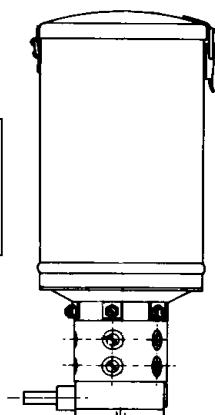

3.1 BARE PUMP ONLY, 4kg RESERVOIR

57-1106	6 outlet pump, 14:1 ratio	Each	\$2,496.00
57-1112	12 outlet pump, 14:1 ratio	Each	\$3,089.70
57-1206	6 outlet pump, 19:1 ratio	Each	\$2,496.00
57-1212	12 outlet pump, 19:1 ratio	Each	\$3,089.70
57-1306	6 outlet pump, 57:1 ratio	Each	\$2,496.00
57-1312	12 outlet pump, 57:1 ratio	Each	\$3,089.70
57-1606	6 outlet pump, 57:1 ratio, with low level switch	Each	\$3,744.10
57-2112	12 outlet pump, with oscillating arm	Each	\$2,415.10



Important Notice
 un-used outlets must
 be adjusted to zero
 use only push-in
 plastic plugs
 screwed plugs may
 cause fatal damage

3.2 PUMP WITH 415V MOTOR AND COUPLING ON BASE PLATE, 4kg RESERVOIR


57-4106	6 outlets, 14:1 ratio mounted with 415v 3ph motor	Each	\$3,965.00
57-4112	12 outlets, 14:1 ratio mounted with 415v 3ph motor	Each	\$4,506.30
57-4206	6 outlets, 19:1 ratio mounted with 415v 3ph motor	Each	\$3,965.00
57-4212	12 outlets, 19:1 ratio mounted with 415v 3ph motor	Each	\$4,506.30
57-4306	6 outlets, 57:1 ratio mounted with 415v 3ph motor	Each	\$3,965.00
57-4606	6 outlets, 57:1 ratio mounted with 415v 3ph motor + L / L	Each	\$4,699.60
57-4312	12 outlets, 57:1 ratio mounted with 415v 3ph motor	Each	\$4,506.30
57-4612	12 outlets, 57:1 ratio, with low level switch & 415v Motor	Each	\$5,240.80

SECTION 4. BEKA FG5 PUMPS "58" SERIES

SPECIFICATIONS

Pump Type:	Rotary, multi-line
Number Of Outlets:	1 to 8 or 9 to 16
Lubricant Type:	Oil or grease to NLGI-2
Reservoir Size:	10 litres/kg oil or grease
Output:	Max 0.15cc per stroke
Motor Type:	0.75kw 3ph 50hz 415V 1405 RPM
Outlets:	1/4"BSP

Important Notice
un-used outlets must
be adjusted to zero
use only push-in
plastic plugs
screwed plugs may
cause fatal damage

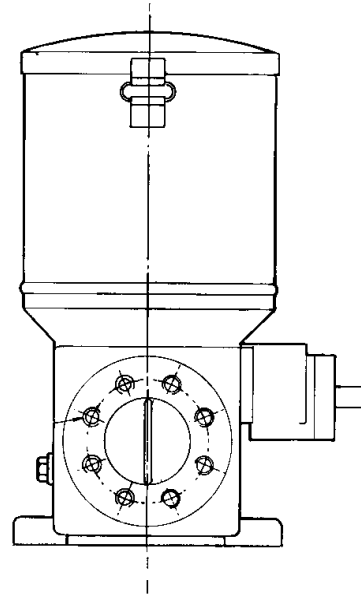

4.1 BARE PUMP ONLY, 10kg RESERVOIR

58-1508	8 outlet pump, 125:1 ratio	Each	\$4,533.30
58-1516	16 outlet pump, 125:1 ratio	Each	\$6,109.00
58-1608	8 outlet pump, 300:1 ratio	Each	\$4,533.30
58-1616	16 outlet pump, 300:1 ratio	Each	\$6,109.00
58-1708	8 outlet pump, 600:1 ratio	Each	\$4,533.30
58-1716	16 outlet pump, 600:1 ratio	Each	\$6,109.00
58-1808	8 outlet pump, 1200:1 ratio	Each	\$4,533.30
58-1816	16 outlet pump, 1200:1 ratio	Each	\$6,109.00
58-2508	8 outlet pump, 125:1 ratio with low level switch	Each	\$5,190.30
58-2516	16 outlet pump, 125:1 ratio with low level switch	Each	\$6,766.20
58-2608	8 outlet pump, 300:1 ratio with low level switch	Each	\$5,190.30
58-2616	16 outlet pump, 300:1 ratio with low level switch	Each	\$6,766.20
58-2708	8 outlet pump, 600:1 ratio with low level switch	Each	\$5,190.30
58-2716	16 outlet pump, 600:1 ratio with low level switch	Each	\$6,766.20
58-2808	8 outlet pump, 1200:1 ratio with low level switch	Each	\$5,190.30
58-2816	16 outlet pump, 1200:1 ratio with low level switch	Each	\$6,766.20

Pump Outputs are adjustable:
 125:1 ratio: 0 to 1.686cc per outlet per minute
 300:1 ratio: 0 to 0.702cc per outlet per minute
 600:1 ratio: 0 to 0.351cc per outlet per minute
 1200:1 ratio: 0 to 0.175cc per outlet per minute



4.2 PUMP WITH 415V MOTOR AND COUPLING ON BASE PLATE, 10kg RESERVOIR

58-3508	8 outlet pump, 125:1 ratio mounted with 415v 3ph motor	Each	\$5,518.20
58-3516	16 outlet pump, 125:1 ratio mounted with 415v 3ph motor	Each	\$7,093.90
58-3608	8 outlet pump, 300:1 ratio mounted with 415v 3ph motor	Each	\$5,518.20
58-3616	16 outlet pump, 300:1 ratio mounted with 415v 3ph motor	Each	\$7,093.90
58-3708	8 outlet pump, 600:1 ratio mounted with 415v 3ph motor	Each	\$5,518.20
58-3716	16 outlet pump, 600:1 ratio mounted with 415v 3ph motor	Each	\$7,093.90
58-3808	8 outlet pump, 1200:1 ratio mounted with 415v 3ph motor	Each	\$5,518.20
58-3816	16 outlet pump, 1200:1 ratio mounted with 415v 3ph motor	Each	\$7,093.90
58-4508	8 outlet pump, 125:1 ratio, low level switch & 415v 3ph motor	Each	\$6,172.60
58-4516	16 outlet pump, 125:1 ratio, low level switch & 415v 3ph motor	Each	\$7,751.00
58-4608	8 outlet pump, 300:1 ratio, low level switch & 415v 3ph motor	Each	\$6,172.60
58-4616	16 outlet pump, 300:1 ratio, low level switch & 415v 3ph motor	Each	\$7,751.00
58-4708	8 outlet pump, 600:1 ratio, low level switch & 415v 3ph motor	Each	\$6,172.60
58-4716	16 outlet pump, 600:1 ratio, low level switch & 415v 3ph motor	Each	\$7,751.00
58-4808	8 outlet pump, 1200:1 ratio, low level switch & 415v 3ph motor	Each	\$6,172.60
58-4816	16 outlet pump, 1200:1 ratio, low level switch & 415v 3ph motor	Each	\$7,751.00

4.3 PUMP WITH HYDRAULIC MOTOR AND COUPLING ON BASE PLATE, 10kg RESERVOIR (SUITABLE FOR UNDERGROUND COAL MINING APPLICATIONS)

58-3508-H	8 outlet pump, 125:1 ratio mounted with hydraulic motor	Each	\$5,761.10
58-3516-H	16 outlet pump, 125:1 ratio mounted with hydraulic motor	Each	\$7,336.90
58-3608-H	8 outlet pump, 300:1 ratio mounted with hydraulic motor	Each	\$5,761.10
58-3616-H	16 outlet pump, 300:1 ratio mounted with hydraulic motor	Each	\$7,336.90
58-3708-H	8 outlet pump, 600:1 ratio mounted with hydraulic motor	Each	\$5,761.10
58-3716-H	16 outlet pump, 600:1 ratio mounted with hydraulic motor	Each	\$7,336.90
58-3808-H	8 outlet pump, 1200:1 ratio mounted with hydraulic motor	Each	\$5,761.10
58-3816-H	16 outlet pump, 1200:1 ratio mounted with hydraulic motor	Each	\$7,336.90